


Providing protection for engines, pumps, compressors, gear boxes, hydraulic reservoirs, marine, industrial power plants and more.

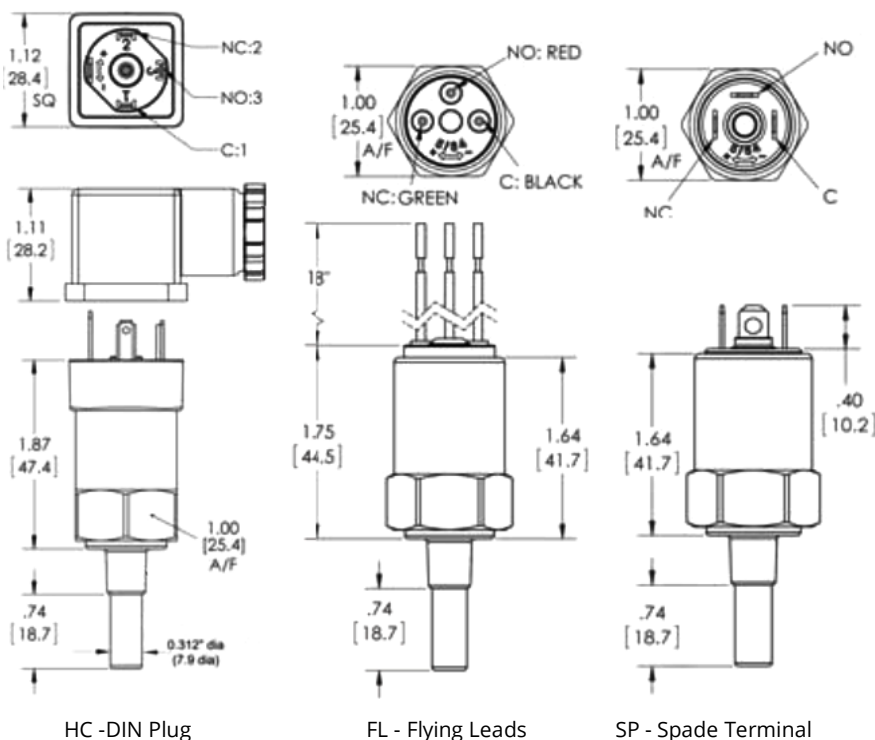

Temperature Range		
PDTF	5°C-150°C	40°F-300°F

Probe length varies per port. Contact us for information

<b>Electrical</b>	5A (12/24 VDC) - (125/250 VAC)
<b>Protection</b>	DIN IP65 - HC, Spade Terminal IP00 - SP, Flying Leads IP69 - FL
<b>Housing Material</b>	Brass
<b>Max. Overpressure</b>	52 bar
<b>Max. Temperature</b>	163°C
<b>Max. Overload</b>	28°C above set point
<b>Tolerance</b>	±3°C

<b>PDTF</b>	-	<b>XXX</b>	-	<b>X</b>	-	<b>XX</b>	-	<b>X</b>	-	<b>XX</b>
	<b>TEMPERATURE SET</b>		<b>DIRECTION</b>		<b>CONNECTION</b>		<b>SWITCH</b>		<b>EC CONNECTION</b>	
	Specify set point required (5°C-150°C)	eg. <b>100C</b>	Rising	<b>R</b>	3/8" NPT	<b>6M</b>	Normally Open	<b>A</b>	DIN Plug	<b>HC</b>
			Falling	<b>F</b>	1/2" NPT (standard)	<b>8M</b>	Normally Closed	<b>B</b>	Flying Leads	<b>FL</b>
					Other sizes can be sourced upon re-		Change Over (standard)	<b>C</b>	Spade Terminal	<b>SP</b>